

AFG 350

- Linea arrotondata priva di spigoli e viti in vista.
- Perno di scorrimento, cromato rettificato.
- Boccole di scorrimento autolubrificanti.
- Paracolpi su carrello in gomma vulcanizzata.
- Coperchio supporto vela smontabile.
- Parafetta in acciaio inox con incastro a baionetta.
- Tutte le minuterie acciaio inox.
- Sistema di tenuta stagna su puleggia.
- Copertura inferiore.
- Scheda elettronica commutabile 110-220-380 V monofase e trifase.
- Affilatoio con vaschetta inferiore di protezione.
- Estrattore lama di serie.

Zaffira

- Manopole plastica.
- Piedini in gomma.
- Pulsanti IP 67 in plastica.
- 49,5 mm di distanza fra la lama e la testa
- Inclinazione lama 35°.

Optional

- Leva sollevamento


- *Rounded design and no sharp edges and visible screws*
- *Chrome plated and ground slide rod.*
- *Self lubricating slide rod bushings.*
- *Vulcanized rubber stops on carriage.*
- *Removable support cover for thickness gauge plate.*
- *Stainless steel slice deflector with bayonet fitting*
- *Stainless steel screws and fittings.*
- *Enclosed and sealed belt pulley.*
- *Bottom cover.*
- *Changeover electronic circuit 110-220-380 V single and three phase.*
- *Built in sharpening tool with bottom protection.*
- *Standard blade removal tool.*

Zaffira

- *Plastic knob.*
- *Rubber feet.*
- *Plastic pushbuttons with IP67 protection rating.*
- *49,5 mm distance between blade and motor*
- *35° blade inclination.*

Optional




- *Lifting lever*

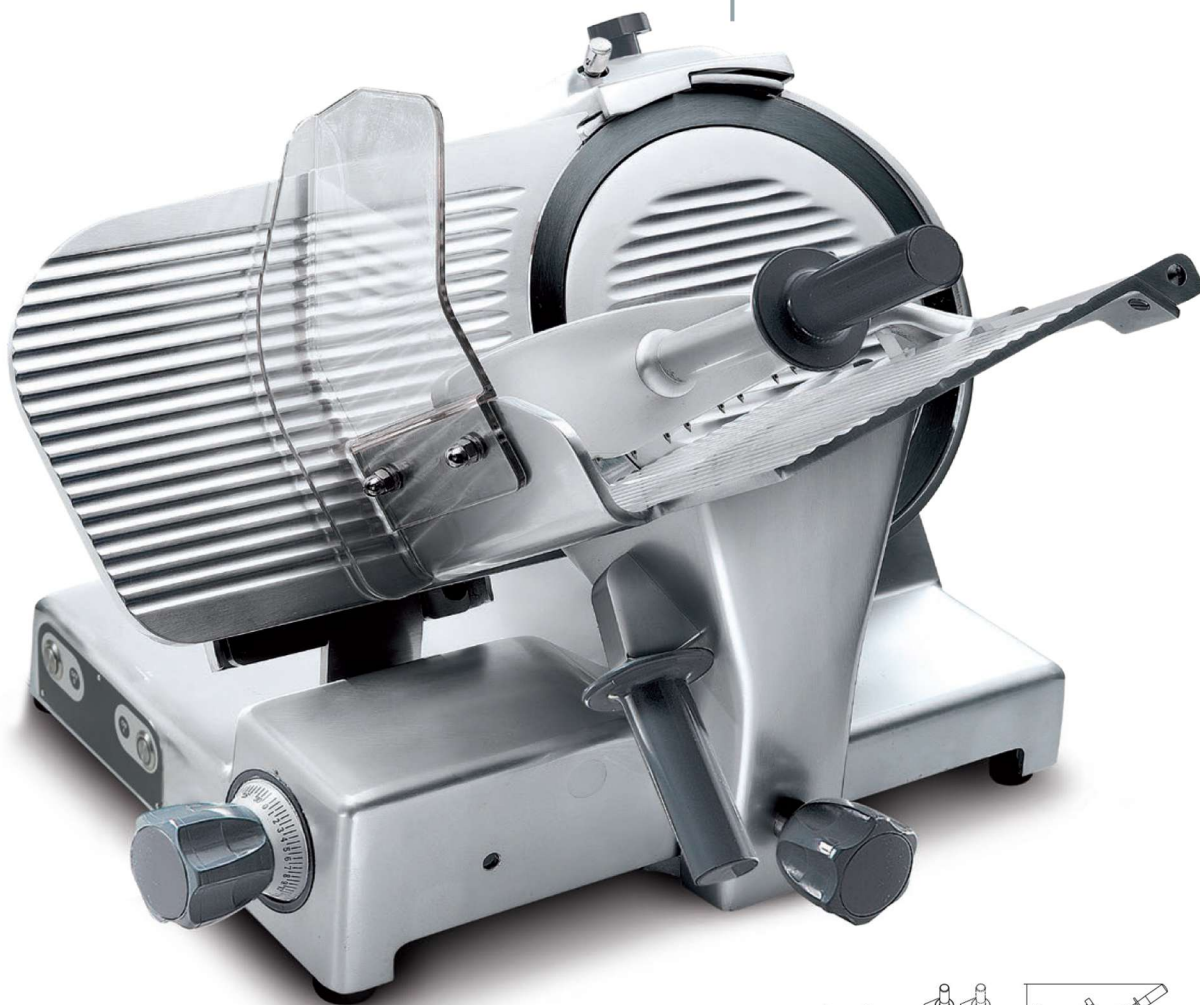

Leva sollevamento
opzionale
Lifting lever optional



Spazioso piano per appoggio
prodotto
Large hopper



ZAFFIRA 350

																				
mm/inch.		watt/hp	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	Kg	mm	Kg
350/14"	1ph - 3ph	370/0.50	23	310	305x270	465	340	660	575	455	710	530	580	270	225	275	250	37	760x640x700	46